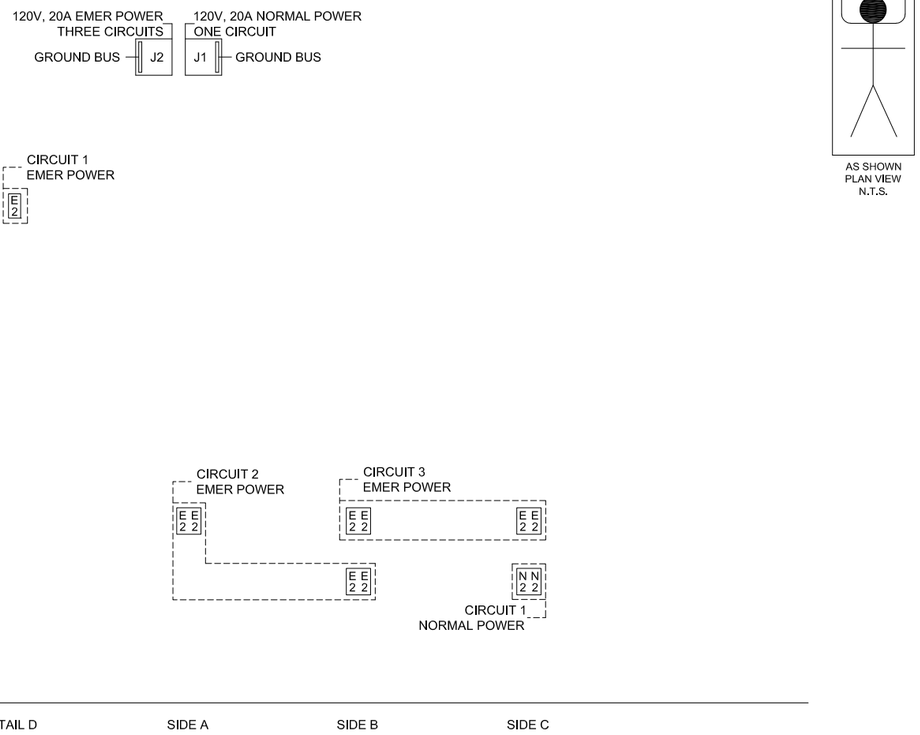



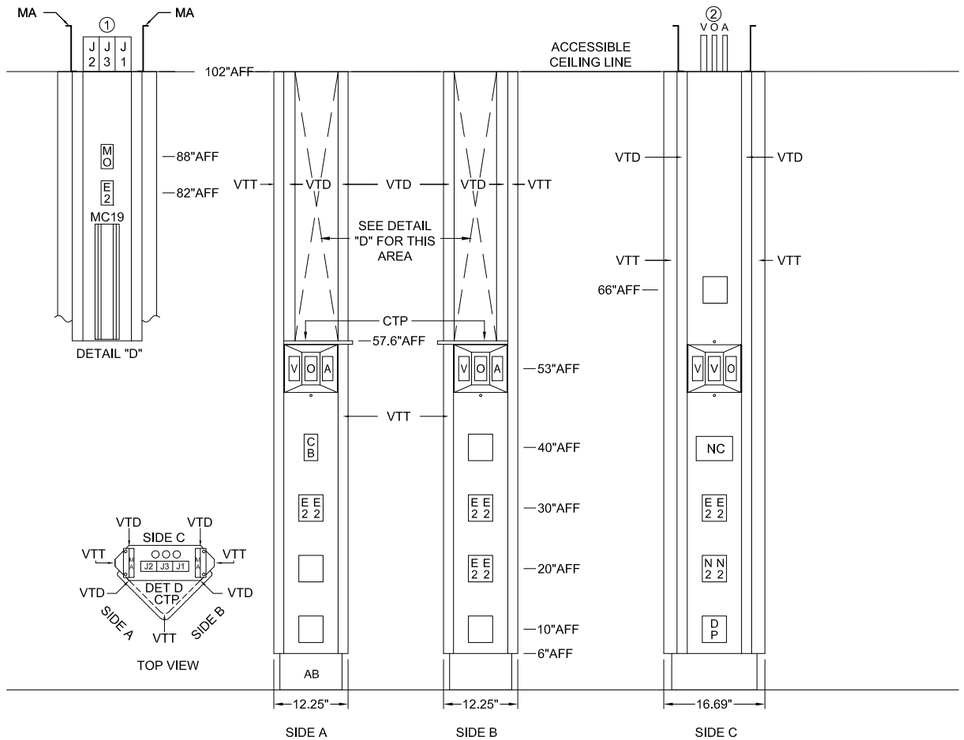

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES			
NORMAL POWER JUNCTION BOX:	J1	COPPER TUBING TYPE:	L	POWDER COATED SURF OR PLATINUM GREY			
EMERGENCY POWER JUNCTION BOX:	J2	OXYGEN SIZE (I.D.):	1/2"				
LOW VOLTAGE JUNCTION BOX:	J3	MEDICAL AIR SIZE (I.D.):	1/2"				
LV CONDUIT STUBS:		VACUUM SIZE (I.D.):	3/4"	LAMINATE: L1 (COUNTER TOP)			
CONDUIT SIZE; LINE VOLTAGE:	1/2"			TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
CONDUIT SIZE; LOW VOLTAGE:	3/4"			HPL	-	-	-
CONDUIT CONNECTORS:	STD. SET SCREW						
WIRE TYPE:	THHN, STRANDED			ELECTRICAL COVER PLATES:	SURF, PLATINUM GREY, OR NYLON TO MATCH DEVICE		
WIRE SIZE:	12 AWG			EQUIPMENT MANAGEMENT:	ANODIZED ALUMINUM		
GROUND WIRE COLOR:	GREEN			UNIT TRIM:	SURF OR PLATINUM GREY		

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
3	O	OXYGEN OUTLET	4	VTD	VERTICAL EQUIPMENT MOUNTING TRACK, DOUBLE
2	A	AIR OUTLET	3	VTT	VERTICAL EQUIPMENT MOUNTING TRACK, TRIPLE
4	V	VACUUM OUTLET	2	MA	MOUNTING ANGLE OR BRACKET
2	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER	1	AB	ADJUSTABLE BASE
9	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER	1	CTP	COUNTERTOP
1	NC	NURSE CALL PROVISION			
1	CB	CODE BLUE PROVISION			
1	DP	DATA OUTLET PROVISION			
1	MO	MONITOR OUTPUT PROVISION			
1	MC19	MONITOR CHANNEL ONLY, 19" LENGTH			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY: X

MINI MULTI-DIMENSIONAL COLUMN
MODEL #5501

AS SHOWN:	DRAWN BY:	DRAWING #
X	XXX	4XXXX

OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX