



AS SHOWN
PLAN VIEW
N.T.S.



TOP VIEW

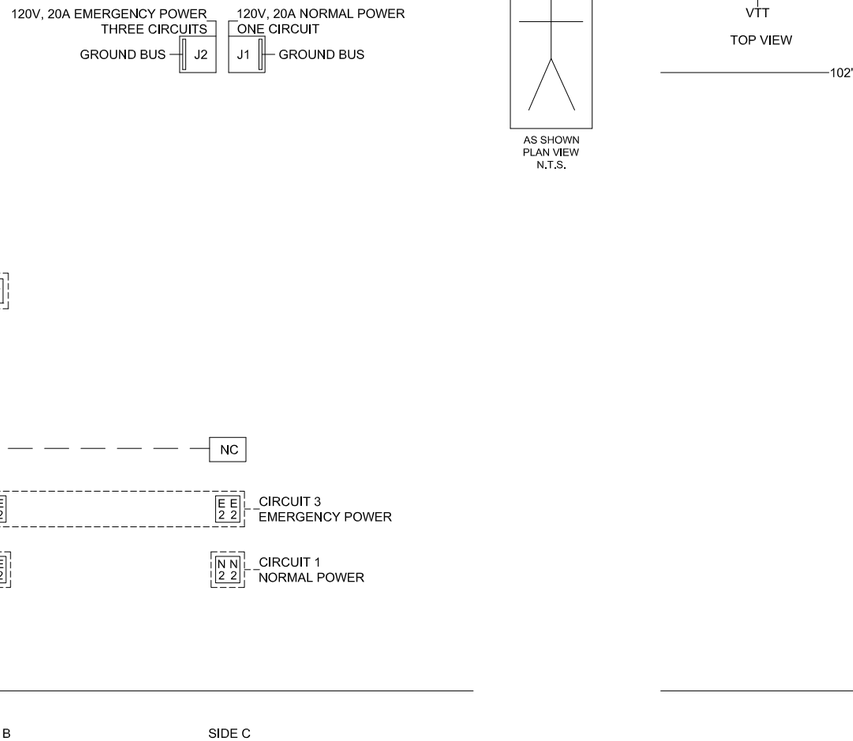

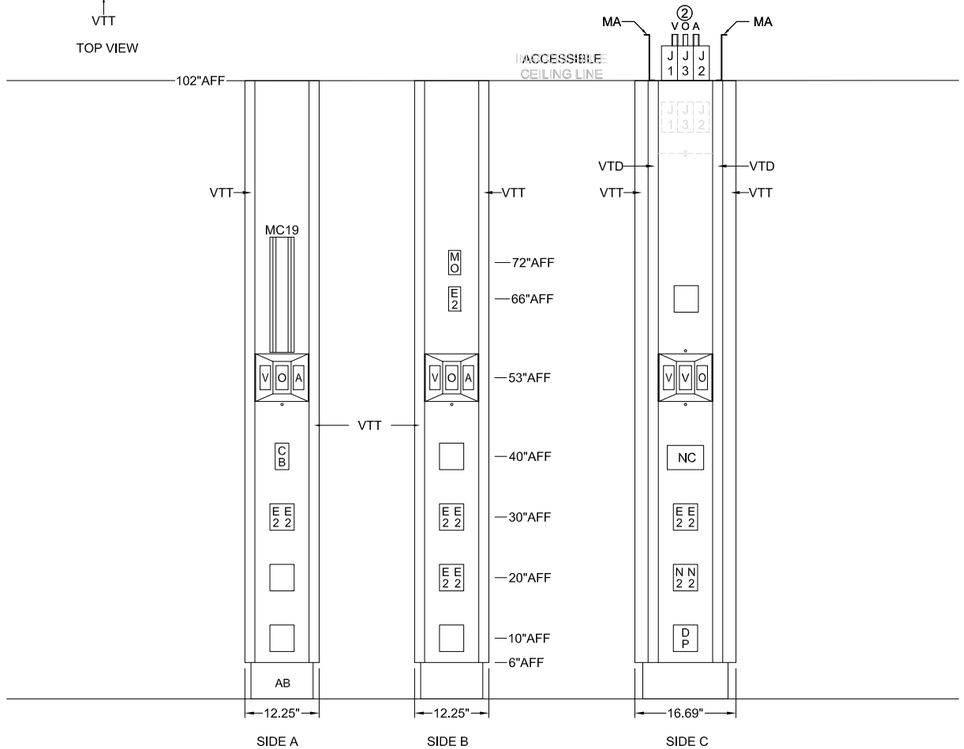

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES	
NORMAL POWER JUNCTION BOX:	J1	COPPER TUBING TYPE:	L	POWDER COATED SURF OR PLATINUM GREY	
EMERGENCY POWER JUNCTION BOX:	J2	OXYGEN SIZE (I.D.):	1/2"		
LOW VOLTAGE JUNCTION BOX:	J3	MEDICAL AIR SIZE (I.D.):	1/2"		
LV CONDUIT STUBS:		VACUUM SIZE (I.D.):	3/4"		
CONDUIT SIZE; LINE VOLTAGE:	1/2"				
CONDUIT SIZE; LOW VOLTAGE:	3/4"				
CONDUIT CONNECTORS:	STD. SET SCREW			ELECTRICAL COVER PLATES:	SURF, PLATINUM GREY, OR NYLON TO MATCH DEVICE
WIRE TYPE:	THHN, STRANDED			EQUIPMENT MANAGEMENT:	ANODIZED ALUMINUM
WIRE SIZE:	12 AWG			UNIT TRIM:	SURF OR PLATINUM GREY
GROUND WIRE COLOR:	GREEN				

LEGEND:

REQ	SYM	DESCRIPTION
3	O	OXYGEN OUTLET
2	A	AIR OUTLET
4	V	VACUUM OUTLET
2	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER
9	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER
1	NC	NURSE CALL PROVISION
1	CB	CODE BLUE PROVISION
1	DP	DATA OUTLET PROVISION
1	MO	MONITOR OUTPUT PROVISION
1	MC19	MONITOR CHANNEL ONLY, 19" LENGTH
2	VTD	VERTICAL EQUIPMENT MOUNTING TRACK, DOUBLE
3	VTT	VERTICAL EQUIPMENT MOUNTING TRACK, TRIPLE
2	MA	MOUNTING ANGLE OR BRACKET
1	AB	ADJUSTABLE BASE

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	MULTI-DIMENSIONAL COLUMN MODEL #5501(SP)	
X		
AS SHOWN: X	DRAWN BY: XXX	DRAWING # 4XXXX
OPPOSITE: X	DATE: XX/XX/XX	PROJECT #: XXXX / SALES ORDER #: XXXXX