NOTES:
1. UNIT IS SEMI-RECESSED AND SHIPS IN SINGLE SECTION
2. UNIT IS BUILT ON 2-7/8" " STUDS AND SET FOR ONE LAYER OF 5/8" GYPSUM BOARD.

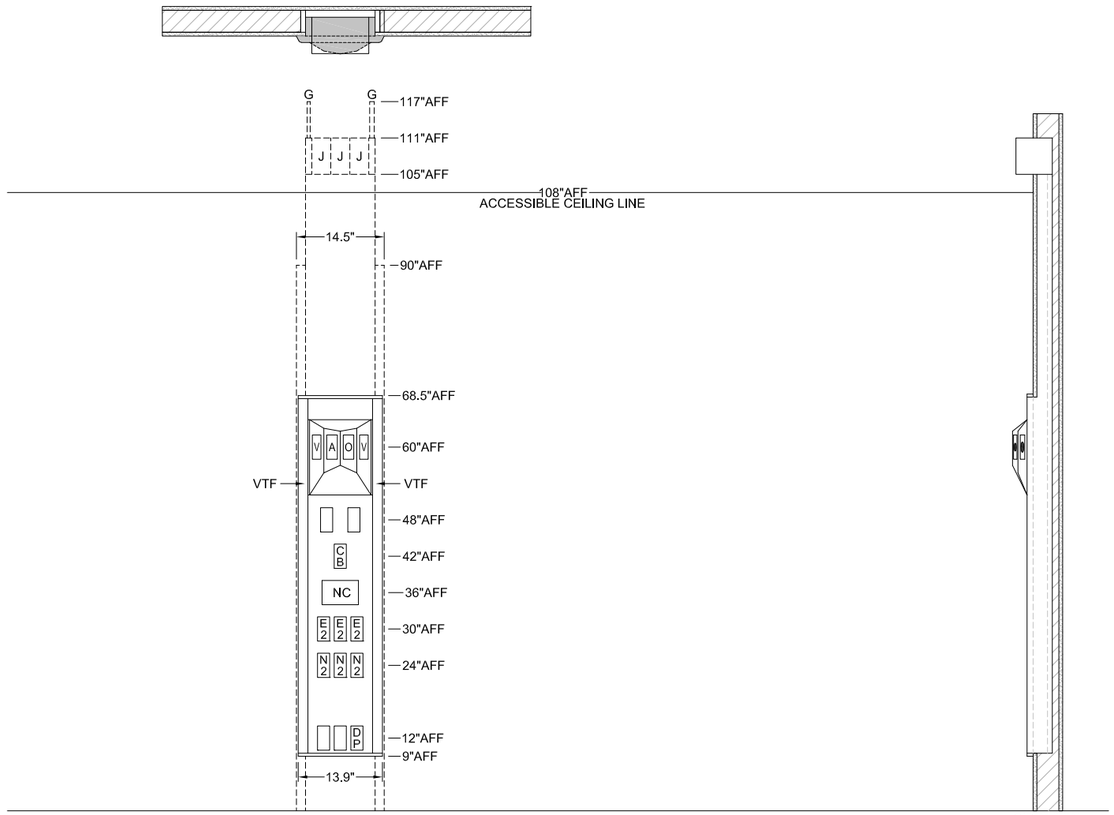

SIDE VIEW

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES	
NORMAL POWER JUNCTION BOX:	J1	COPPER TUBING TYPE:	L		
EMERGENCY POWER JUNCTION BOX:	J2	OXYGEN SIZE (I.D.):	1/2"		
LOW VOLTAGE JUNCTION BOX:	J3	MEDICAL AIR SIZE (I.D.):	1/2"		
		VACUUM SIZE (I.D.):	3/4"		
CONDUIT SIZE; LINE VOLTAGE:	1/2"				
CONDUIT SIZE; LOW VOLTAGE:	3/4"				
CONDUIT CONNECTORS:	STD. SET SCREW				
WIRE TYPE:	THHN, STRANDED			ELECTRICAL COVER PLATES:	PLATINUM GRAY OR SURF
WIRE SIZE:	12 AWG			EQUIPMENT MANAGEMENT:	PLATINUM GRAY OR SURF
GROUND WIRE COLOR:	GREEN			UNIT TRIM:	PLATINUM GRAY OR SURF

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
1	O	OXYGEN OUTLET			
1	A	AIR OUTLET			
2	V	VACUUM OUTLET			
3	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER			
3	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER			
1	NC	NURSE CALL PROVISION			
1	CB	CODE BLUE PROVISION			
1	DP	DATA OUTLET PROVISION			
2	VTF	VERTICAL EQUIPMENT MOUNTING TRACK, FASCIA			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	INTERNAL RACEWAY PROFILE MODEL #7011-QIR		
X			
AS SHOWN:	DRAWN BY:	DRAWING #	
X	XXX	4XXXX	
OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX