NOTES:
1. UNITS ARE SURFACE MOUNTED. STANDARD (MSC) ROUGH-IN TEMPLATES ARE INCLUDED WITH THESE UNITS. SEE INSTALLATION INSTRUCTIONS FOR MORE INFORMATION.

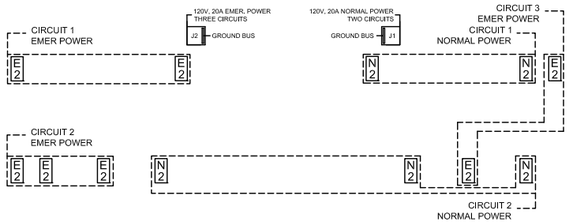

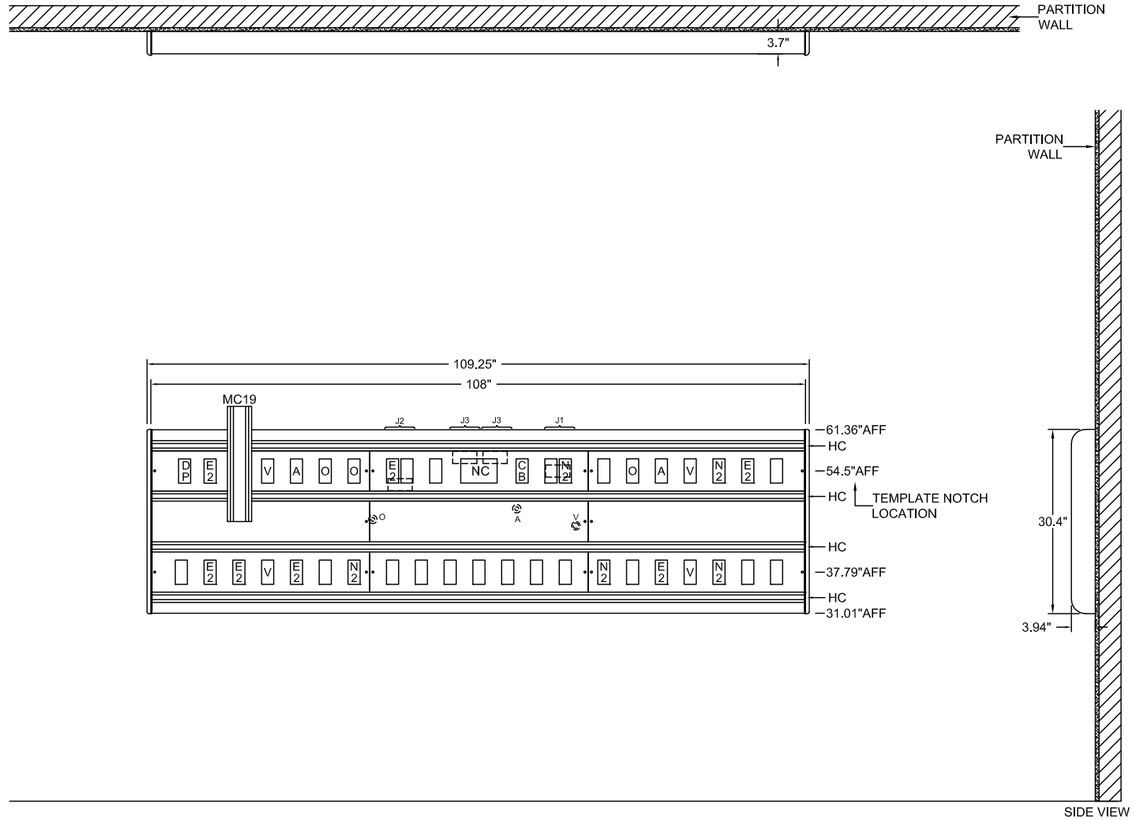

GENERAL SPECIFICATIONS:

ELECTRICAL			PLUMBING			FINISHES			
NORMAL POWER JUNCTION BOX:	J1		COPPER TUBING TYPE:	L		LAMINATE: L1			
EMERGENCY POWER JUNCTION BOX:	J2		OXYGEN SIZE (I.D.):	1/2"		TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
LOW VOLTAGE JUNCTION BOX:	J3		MEDICAL AIR SIZE (I.D.):	1/2"		-	-	-	-
			VACUUM SIZE (I.D.):	3/4"					
CONDUIT CONNECTORS:	STD. SET SCREW								
WIRE TYPE:	THHN, STRANDED					ELECTRICAL COVER PLATES:	SURF OR PLATINUM GREY		
WIRE SIZE:	12 AWG					EQUIPMENT MANAGEMENT:	ANODIZED ALUMINUM		
GROUND WIRE COLOR:	GREEN					UNIT TRIM:	SURF OR PLATINUM GRAY		

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
3	O	OXYGEN OUTLET			
2	A	AIR OUTLET			
4	V	VACUUM OUTLET			
5	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER			
7	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER			
1	NC	NURSE CALL PROVISION			
1	CB	CODE BLUE PROVISION			
1	DP	DATA OUTLET PROVISION			
4	HC	HORIZONTAL ACCESSORY CHANNEL			
1	MC19	518-2302 MONITOR CHANNEL, 19", CHANNEL MOUNT			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	PROVIDER PLUS® TWO TIER MODEL 6600-AC		
X			
AS SHOWN: X	DRAWN BY: XXX	DRAWING # 4XXXX	
OPPOSITE: X	DATE: XX/XX/XX	PROJECT #: XXXX	SALES ORDER #: XXXXX