NOTES:
1. SILHOUETTE UNIT IS SEMI-RECESSED. SERVICES ARE TOP FED. UNIT IS BUILT IN THREE VERTICAL SECTIONS.
2. THE ACTUAL LOCATIONS OF THE JUNCTION BOXES, CONDUIT TERMINATION POINTS AND MEDICAL GAS TERMINATION POINTS ARE SUBJECT TO CHANGE.
3. SINGLE SIDED UNITS INSTALL IN A 3-5/8" PARTITION; BACK TO BACK UNITS INSTALL IN A 6" PARTITION. ALL UNITS SET FOR A 5/8" GYPSUM BOARD FINISH.
4. INTER CONNECTIONS MAY BE REQUIRED BETWEEN MODULES.
5. SERVICES TO BE REVERSED ON OPPOSITE HAND UNITS

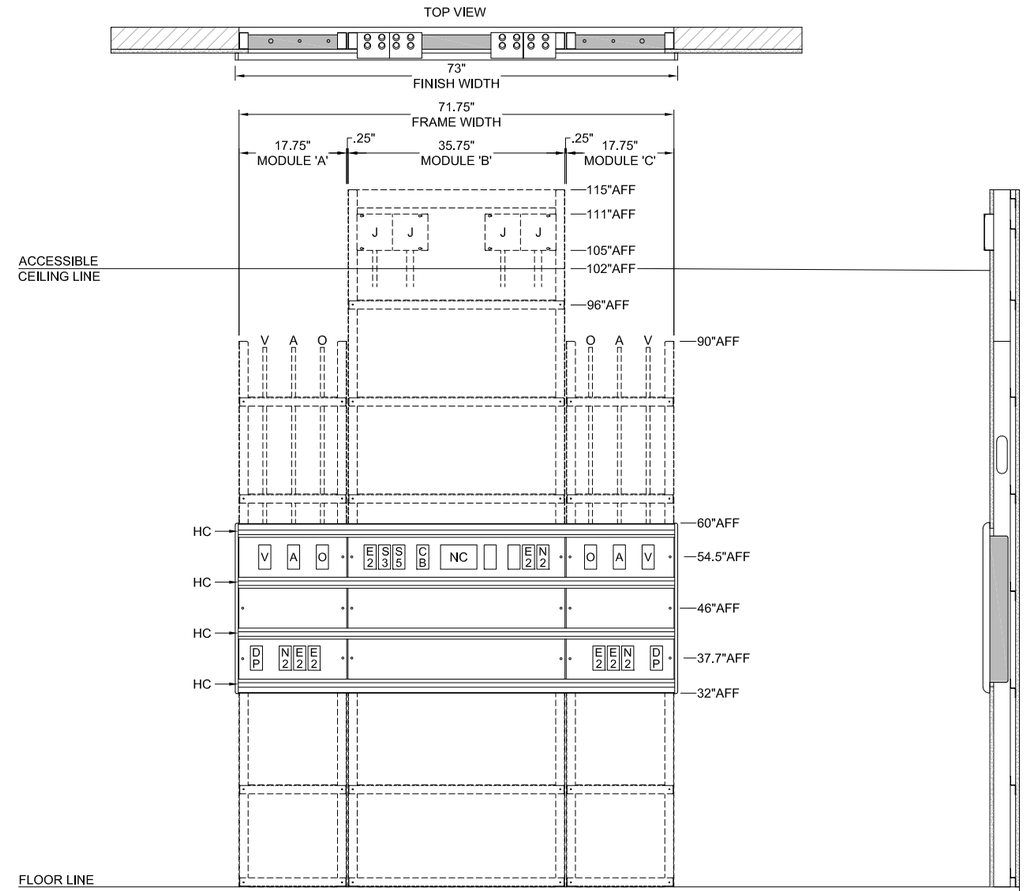

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES			
NORMAL POWER JUNCTION BOX:	J1	COPPER TUBING TYPE:	L	LAMINATE: L1			
EMERGENCY POWER JUNCTION BOX:	J2	OXYGEN SIZE (I.D.):	1/2"	TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
LOW VOLTAGE JUNCTION BOX:	J3	MEDICAL AIR SIZE (I.D.):	1/2"	HPL	-	-	-
LIGHTING JUNCTION BOX	J5	VACUUM SIZE (I.D.):	3/4"				
CONDUIT SIZE; LINE VOLTAGE:	1/2"						
CONDUIT SIZE; LOW VOLTAGE:	3/4"						
CONDUIT CONNECTORS:	STD. SET SCREW						
WIRE TYPE:	THHN, STRANDED			ELECTRICAL COVER PLATES:	PLATINUM GRAY, SURF OR PAINTED TO MATCH DEVICE		
WIRE SIZE:	12 AWG			EQUIPMENT MANAGEMENT:	PLATINUM GRAY OR SURF		
GROUND WIRE COLOR:	GREEN			UNIT TRIM:	PLATINUM GRAY OR SURF		

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET	4	HC	HORIZONTAL ACCESSORY CHANNEL
2	A	AIR OUTLET			
2	V	VACUUM OUTLET			
3	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER			
6	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER			
1	S3	LIGHT SWITCH, 1P, 20A, 125/277V, RED TOGGLE HANDLE			
1	S5	LOW VOLTAGE SWITCH, 1P, MOM CONTACT, 120V, 3 POSITION, CENTER OFF, IVORY			
1	NC	NURSE CALL PROVISION			
1	CB	CODE BLUE PROVISION			
2	DP	DATA OUTLET PROVISION			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	SILHOUETTE® SEMI-RECESSED MODEL 8600		
X			
AS SHOWN: X	DRAWN BY: XXX	DRAWING # 4XXXX	
OPPOSITE: X	DATE: XX/XX/XX	PROJECT #: XXXX	SALES ORDER #: XXXXX