NOTES:
1. FORM UNIT IS WALL MOUNTED, SERVICES ARE TOP FED. UNIT IS BUILT IN TWO VERTICAL MODULES.
2. THE ACTUAL LOCATIONS OF THE JUNCTION BOXES, CONDUIT TERMINATION POINTS AND MEDICAL GAS TERMINATION POINTS ARE SUBJECT TO CHANGE.
3. INTER CONNECTIONS MAY BE REQUIRED BETWEEN MODULES.
4. SERVICES TO BE REVERSED ON OPPOSITE HAND UNITS

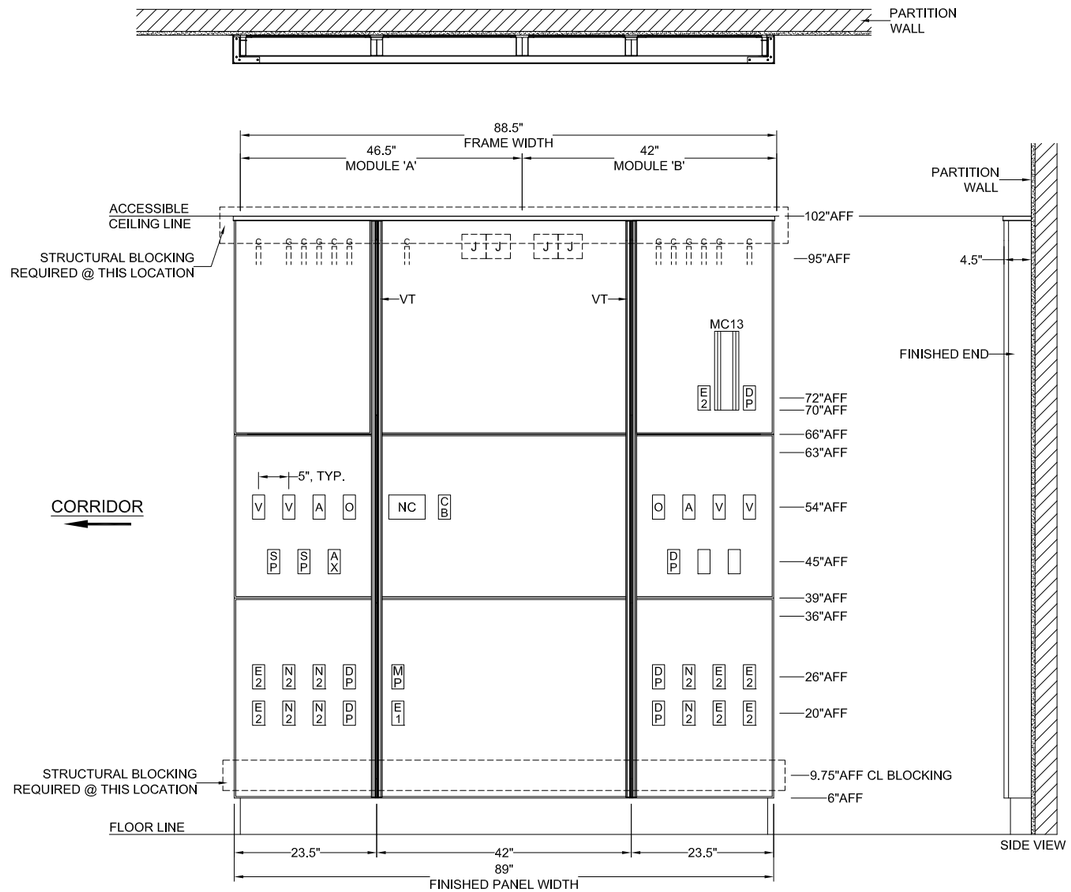

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING	
NORMAL POWER JUNCTION BOX:	J	COPPER TUBING TYPE:	L
EMERGENCY POWER JUNCTION BOX:	J	OXYGEN SIZE (I.D.):	1/2"
LIGHTING JUNCTION BOX:	J	MEDICAL AIR SIZE (I.D.):	1/2"
LV CONDUIT STUBS:	C	VACUUM SIZE (I.D.):	3/4"
CONDUIT SIZE; LINE VOLTAGE:	1/2"		
CONDUIT SIZE; LOW VOLTAGE:	3/4"		
CONDUIT CONNECTORS:	STD. SET SCREW		
WIRE TYPE:	THHN, STRANDED		
WIRE SIZE:	12 AWG		
GROUND WIRE COLOR:	GREEN		

FINISHES FINISHES (3/4" LAMINATED PANELS)			
LAMINATE: L1			
TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
-	-	-	-
BACK LIT LED RESIN PANEL: R1 OR LAMINATE: L2			
TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
-	-	-	-
ELECTRICAL COVER PLATES:	STAINLESS OR NYLON TO MATCH DEVICE		
HORIZONTAL CHANNELS:	ANODIZED ALUMINUM		
UNIT TRIM:	ANODIZED ALUMINUM		

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET	6	DP	DATA OUTLET PROVISION
2	A	AIR OUTLET	1	MP	MULTI-PIN BED RECEPT. PROVISION
4	V	VACUUM OUTLET	1	MC13	MONITOR CHANNEL ONLY, 13" LENGTH
6	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER	2	VT	VERTICAL EQUIPMENT MOUNTING TRACK
1	E1	SINGLE RECEPTACLE, 8310 RED, 20A, 125V, H.G., EMER. POWER			
7	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER			
1	NC	NURSE CALL PROVISION			
1	CB	CODE BLUE PROVISION			
1	AX	AUXILIARY ALARM PROVISION			
2	SP	SWITCH PROVISION			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	FORM® 7510 SERIES FLOOR MOUNTED		
X			
AS SHOWN:	DRAWN BY:	DRAWING #	
X	XXX	4XXXX	
OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX