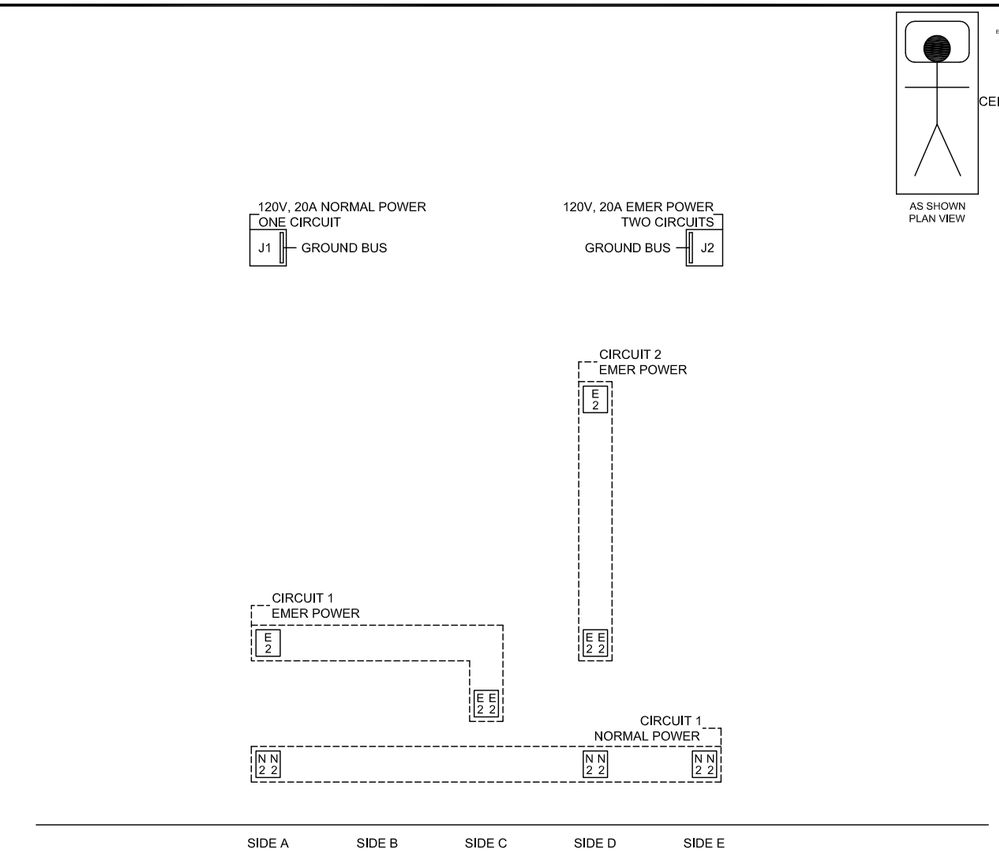

WIRING DIAGRAM

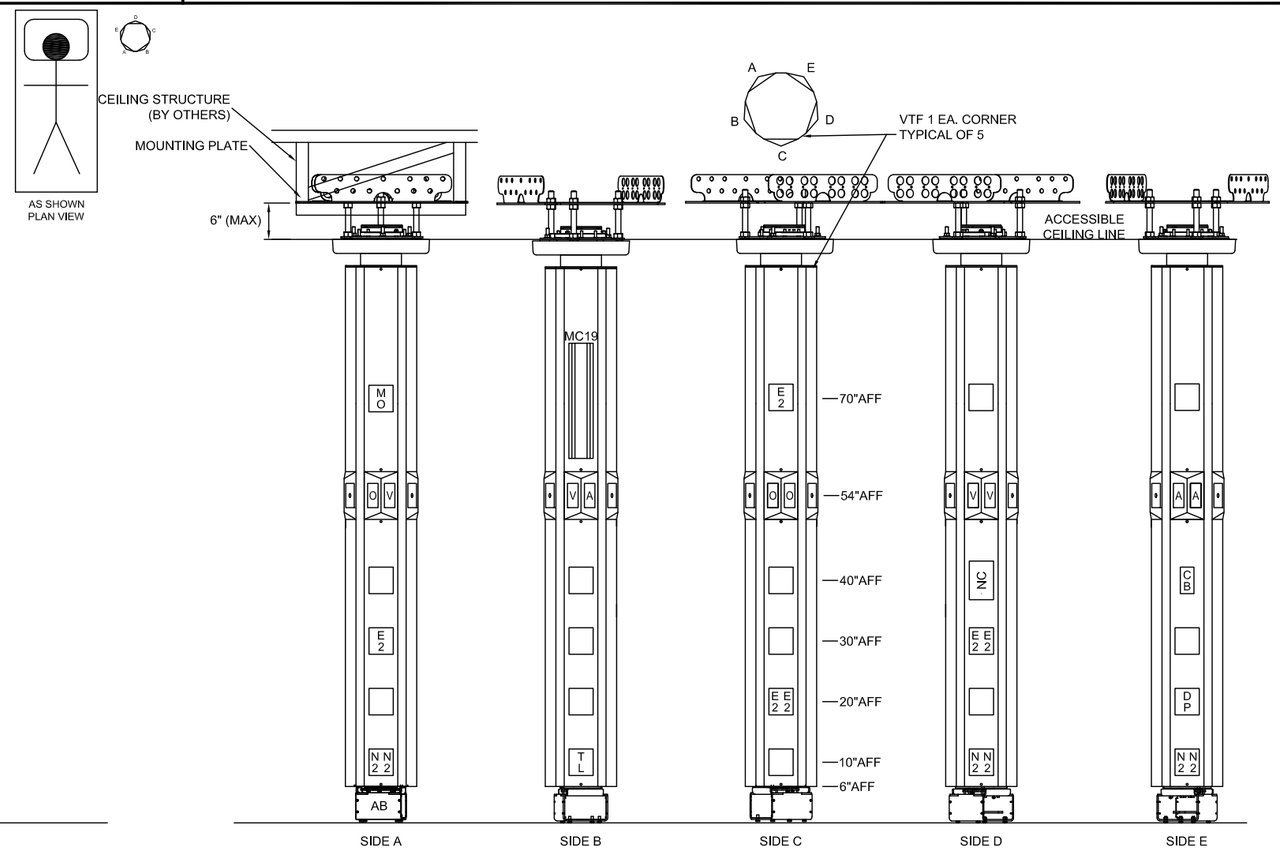

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES	
NORMAL POWER JUNCTION BOX:	J1	COPPER TUBING TYPE:	L	POWDER COATED SURF OR PLATINUM GREY	
EMERGENCY POWER JUNCTION BOX:	J2	OXYGEN SIZE (I.D.):	1/2"		
LOW VOLTAGE JUNCTION BOX:	J3	MEDICAL AIR SIZE (I.D.):	1/2"		
LV CONDUIT STUBS:		VACUUM SIZE (I.D.):	3/4"		
CONDUIT SIZE; LINE VOLTAGE:	1/2"				
CONDUIT SIZE; LOW VOLTAGE:	3/4"				
CONDUIT CONNECTORS:	STD. SET SCREW				
WIRE TYPE:	THHN, STRANDED			ELECTRICAL COVER PLATES:	SURF, PLATINUM GREY, OR NYLON TO MATCH DEVICE
WIRE SIZE:	12 AWG			EQUIPMENT MANAGEMENT:	ANODIZED ALUMINUM
GROUND WIRE COLOR:	GREEN			UNIT TRIM:	SURF OR PLATINUM GREY

LEGEND:

REQ	SYM	DESCRIPTION
3	O	OXYGEN OUTLET
3	A	AIR OUTLET
4	V	VACUUM OUTLET
6	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER
6	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER
1	NC	NURSE CALL PROVISION
1	CB	CODE BLUE PROVISION
1	TL	TELEPHONE OUTLET PROVISION
1	DP	DATA OUTLET PROVISION
1	MO	MONITOR OUTPUT PROVISION

REQ	SYM	DESCRIPTION
1	MC19	MONITOR CHANNEL ONLY, 19" LENGTH
1	AB	ADJUSTABLE BASE
5	VTF	VERTICAL EQUIPMENT MOUNTING TRACK, FASCIA
1	BR	BRAKE RELEASE

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY: X

5 SIDED OPEN ACCESS COLUMN
MODEL 5706-R

AS SHOWN:	DRAWN BY:	DRAWING #
X	XXX	4XXXX

OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX