NOTES:
1. EVOLUTION UNIT IS SEMI-RECESSED TYPE. SERVICES ARE TOP FED USING EVOLUTION FAST TRACK TEMPLATES (INCLUDED).
2. SERVICES TO BE REVERSED ON OPPOSITE HAND UNITS
3. DEVICE SPACING IS 5" UNLESS NOTED OTHERWISE
4. ALL INTERIOR STUD FRAMING IS TO FIT A 3-5/8" METAL STUD WALL. SURFACE SURROUNDING THE UNIT TO BE 5/8" GYPSUM BOARD ONLY.



WIRING DIAGRAM

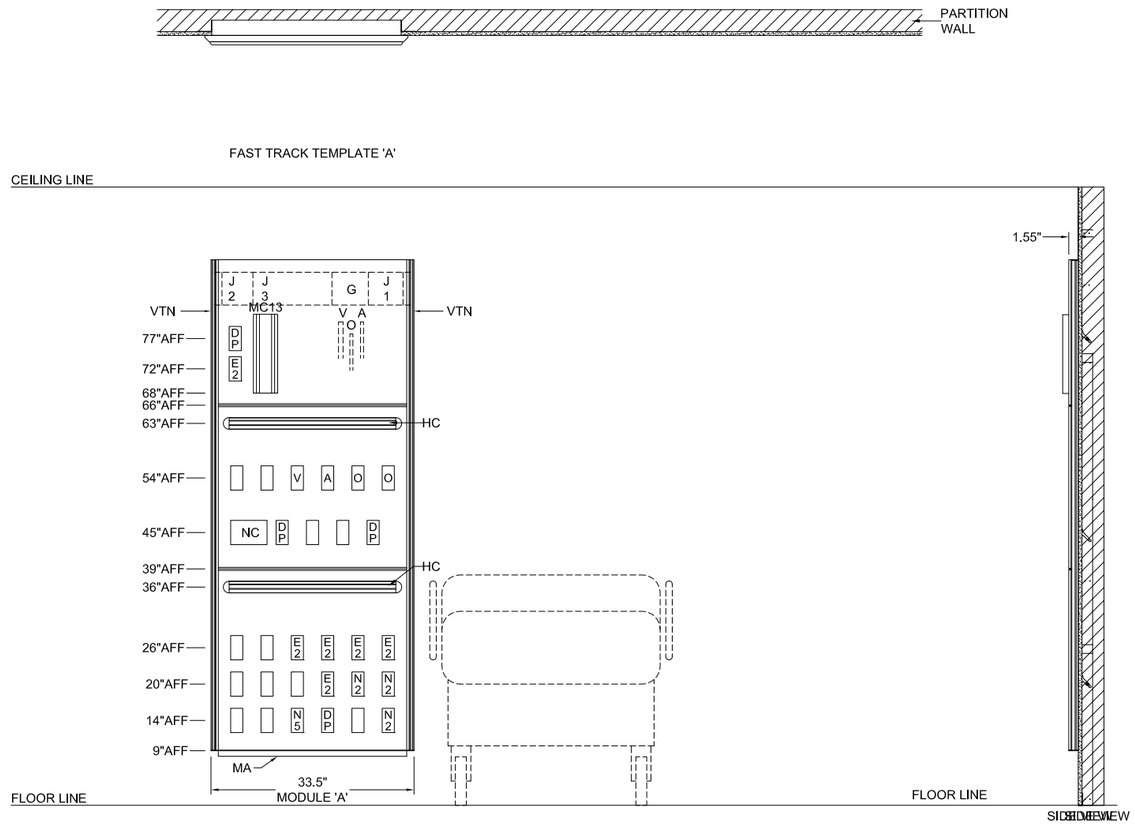

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES			
NORMAL POWER JUNCTION BOX:	J	COPPER TUBING TYPE:	L	LAMINATE: L1			
EMERGENCY POWER JUNCTION BOX:	J	OXYGEN SIZE (I.D.):	1/2"	TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
LIGHTING JUNCTION BOX:	J	MEDICAL AIR SIZE (I.D.):	1/2"	3DL	-	-	-
LV CONDUIT STUBS:	C	VACUUM SIZE (I.D.):	3/4"				
CONDUIT SIZE; LINE VOLTAGE:	1/2"						
CONDUIT SIZE; LOW VOLTAGE:	3/4"						
CONDUIT CONNECTORS:	STD. SET SCREW						
WIRE TYPE:	THHN, STRANDED			ELECTRICAL COVER PLATES:	STAINLESS OR NYLON TO MATCH DEVICE		
WIRE SIZE:	12 AWG			VERTICAL TRACKS:	PLATINUM GREY		
GROUND WIRE COLOR:	GREEN			UNIT TRIM:	PLATINUM GREY		

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
2	O	OXYGEN OUTLET	2	VTN	NEOTRACK® VERTICAL EQUIPMENT MOUNTING TRACK, FASCIA
1	A	AIR OUTLET			
1	V	VACUUM OUTLET			
3	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER			
1	N5	USB CHARGER RECEPTACLE, HUBBELL, 20A, 125V AC, IVORY, USB8300A5I			
6	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER			
1	NC	NURSE CALL PROVISION			
4	DP	DATA OUTLET PROVISION			
1	MC13	MONITOR CHANNEL ONLY, 13" LENGTH			
2	HC	HORIZONTAL ACCESSORY CHANNEL			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	EVOLUTION SERIES® 7600-R SEMI-RECESSED MODEL #7635-R		
X			
AS SHOWN:	DRAWN BY:	DRAWING #	
X	XXX	4XXXX	
OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX