NOTES:
1. SILHOUETTE III UNITS ARE SEMI-RECESSED TYPE, BUILT IN A SINGLE SECTION AND SET FOR A SINGLE LAYER OF 5/8" GYPSUM BOARD WALL FINISH.
2. THE ACTUAL LOCATIONS OF THE JUNCTION BOXES, CONDUIT TERMINATION POINTS AND MEDICAL GAS TERMINATION POINTS ARE SUBJECT TO CHANGE.
3. SINGLE UNITS INSTALL IN A 3-5/8" PARTITION.
4. BACK-TO-BACK UNITS INSTALL IN A 6" PARTITION. IF AN STC RATING OF 50 IS REQUIRED, SEE NOTE AND FIGURE 2 ON PAGE 3 OF THE INSTALLATION INSTRUCTIONS.
5. SERVICES ARE REVERSED ON OPPOSITE HAND UNITS.



TOP VIEW

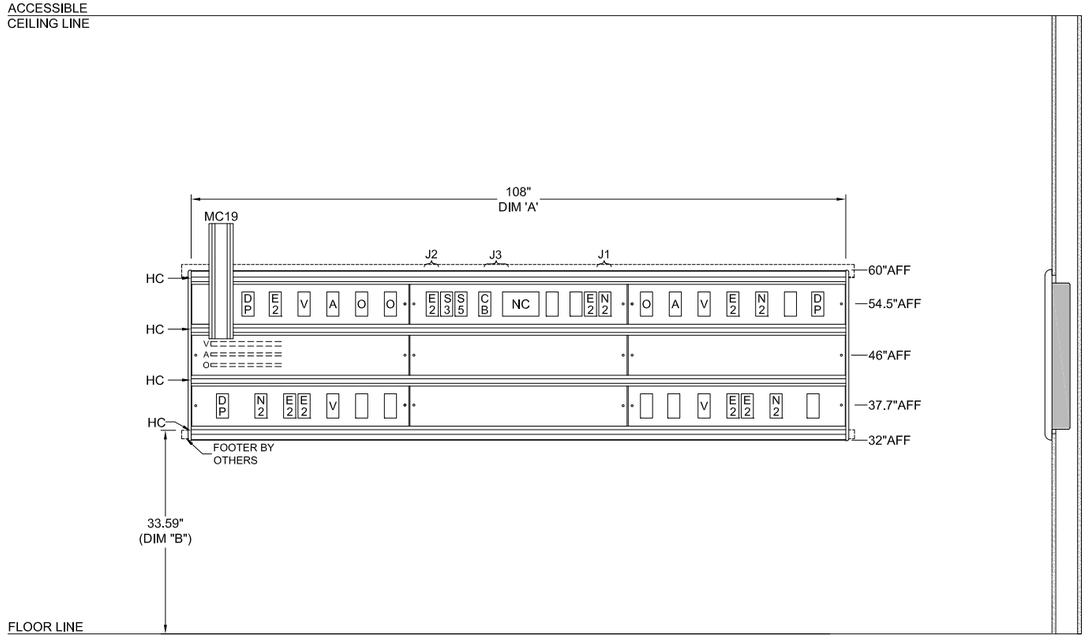

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING	
NORMAL POWER JUNCTION BOX:	J1	COPPER TUBING TYPE:	L
EMERGENCY POWER JUNCTION BOX:	J2	OXYGEN SIZE (I.D.):	1/2"
LOW VOLTAGE JUNCTION BOX:	J3	MEDICAL AIR SIZE (I.D.):	1/2"
LIGHTING JUNCTION BOX	J5	VACUUM SIZE (I.D.):	3/4"
CONDUIT SIZE; LINE VOLTAGE:	1/2"		
CONDUIT SIZE; LOW VOLTAGE:	3/4"		
CONDUIT CONNECTORS:	STD. SET SCREW		
WIRE TYPE:	THHN, STRANDED		
WIRE SIZE:	12 AWG		
GROUND WIRE COLOR:	GREEN		

FINISHES			
LAMINATE: L1			
TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
HPL	-	-	-
ELECTRICAL COVER PLATES:	PLATINUM GRAY, SURF OR PAINTED TO MATCH DEVICE		
EQUIPMENT MANAGEMENT:	PLATINUM GRAY OR SURF		
UNIT TRIM:	PLATINUM GRAY OR SURF		

LEGEND:

REQ	SYM	DESCRIPTION
3	O	OXYGEN OUTLET
2	A	AIR OUTLET
4	V	VACUUM OUTLET
4	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER
8	E2	DUPLEX RECEPTACLE, 8300 IVORY, 20A, 125V, H.G., NORMAL POWER
1	S3	LIGHT SWITCH, 1P, 20A, 125/277V, RED TOGGLE HANDLE
1	S5	LOW VOLTAGE SWITCH, 1P, MOM CONTACT, 120V, 3 POSITION, CENTER OFF, IVORY
1	NC	NURSE CALL PROVISION
1	CB	CODE BLUE PROVISION
3	DP	DATA OUTLET PROVISION

REQ	SYM	DESCRIPTION
4	HC	HORIZONTAL ACCESSORY CHANNEL
1	MC19	518-2302 MONITOR CHANNEL, 19", CHANNEL MOUNT

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY:	SILHOUETTE III® SEMI-RECESSED MODEL 8610		
X			
AS SHOWN:	DRAWN BY:	DRAWING #	
X	XXX	4XXXX	
OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX