NOTES:
1. SILHOUETTE UNIT IS SEMI-RECESSED. SERVICES ARE TOP FED. UNIT IS BUILT IN THREE VERTICAL SECTIONS.
2. THE ACTUAL LOCATIONS OF THE JUNCTION BOXES, CONDUIT TERMINATION POINTS AND MEDICAL GAS TERMINATION POINTS ARE SUBJECT TO CHANGE.
3. SINGLE SIDED UNITS INSTALL IN A 3-5/8" PARTITION; BACK TO BACK UNITS INSTALL IN A 6" PARTITION. ALL UNITS SET FOR A 5/8" GYPSUM BOARD FINISH.
4. INTER CONNECTIONS MAY BE REQUIRED BETWEEN MODULES.
5. SERVICES TO BE REVERSED ON OPPOSITE HAND UNITS

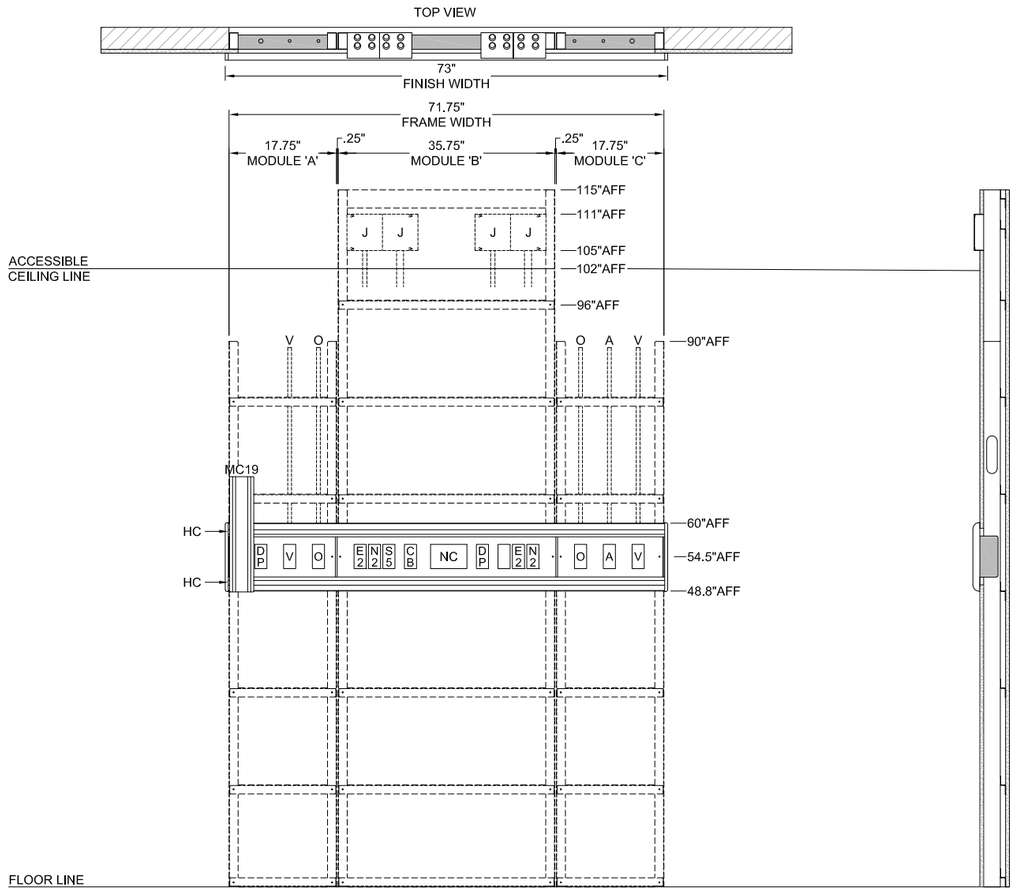


## GENERAL SPECIFICATIONS:

| ELECTRICAL | | PLUMBING | |
|---|---|---|---|
| NORMAL POWER JUNCTION BOX: | J1 | COPPER TUBING TYPE: | L |
| EMERGENCY POWER JUNCTION BOX: | J2 | OXYGEN SIZE (I.D.): | 1/2" |
| LOW VOLTAGE JUNCTION BOX: | J3 | MEDICAL AIR SIZE (I.D.): | 1/2" |
| LIGHTING JUNCTION BOX | J5 | VACUUM SIZE (I.D.): | 3/4" |
| CONDUIT SIZE; LINE VOLTAGE: | 1/2" | | |
| CONDUIT SIZE; LOW VOLTAGE: | 3/4" | | |
| CONDUIT CONNECTORS: | STD. SET SCREW | | |
| WIRE TYPE: | THHN, STRANDED | | |
| WIRE SIZE: | 12 AWG | | |
| GROUND WIRE COLOR: | GREEN | | |

| FINISHES | | | |
|---|---|---|---|
| LAMINATE: L1 | | | |
| TYPE: | LAMINATE BRAND: | LAMINATE COLOR: | GRAIN ORIENTATION: |
| HPL | - | - | - |
| ELECTRICAL COVER PLATES: | PLATINUM GRAY, SURF OR PAINTED TO MATCH DEVICE | | |
| EQUIPMENT MANAGEMENT: | PLATINUM GRAY OR SURF | | |
| UNIT TRIM: | PLATINUM GRAY OR SURF | | |

## LEGEND:

| REQ | SYM | DESCRIPTION |
|---|---|---|
| 2 | O | OXYGEN OUTLET |
| 1 | A | AIR OUTLET |
| 2 | V | VACUUM OUTLET |
| 2 | N2 | DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER |
| 2 | E2 | DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER |
| 1 | S5 | LOW VOLTAGE SWITCH, 1P, MOM CONTACT, 120V, 3 POSITION, CENTER OFF, IVORY |
| 1 | NC | NURSE CALL PROVISION |
| 1 | CB | CODE BLUE PROVISION |
| 2 | DP | DATA OUTLET PROVISION |
| 2 | HC | HORIZONTAL ACCESSORY CHANNEL |
| 1 | MC19 | 518-2302 MONITOR CHANNEL, 19", CHANNEL MOUNT |

## ACCESSORIES NOT SHOWN (PER UNIT)

| REQ | DESCRIPTION |
|---|---|

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

| TOTAL QTY: | SILHOUETTE® SEMI-RECESSED MODEL 8500 | | |
|---|---|---|---|
| X | | | |
| AS SHOWN: X | DRAWN BY: XXX | DRAWING # 4XXXX | |
| OPPOSITE: X | DATE: XX/XX/XX | PROJECT #: XXXX | SALES ORDER #: XXXXX |