NOTES:
1. EVOLUTION UNIT IS SURFACE MOUNTED, FLOATING TYPE. SERVICES ARE TOP FED.
2. SERVICES TO BE REVERSED ON OPPOSITE HAND UNITS
3. DEVICE SPACING IS 5" UNLESS NOTED OTHERWISE
4. FINAL SERVICE TERMINATIONS DETERMINED DURING PRODUCTION ENGINEERING.

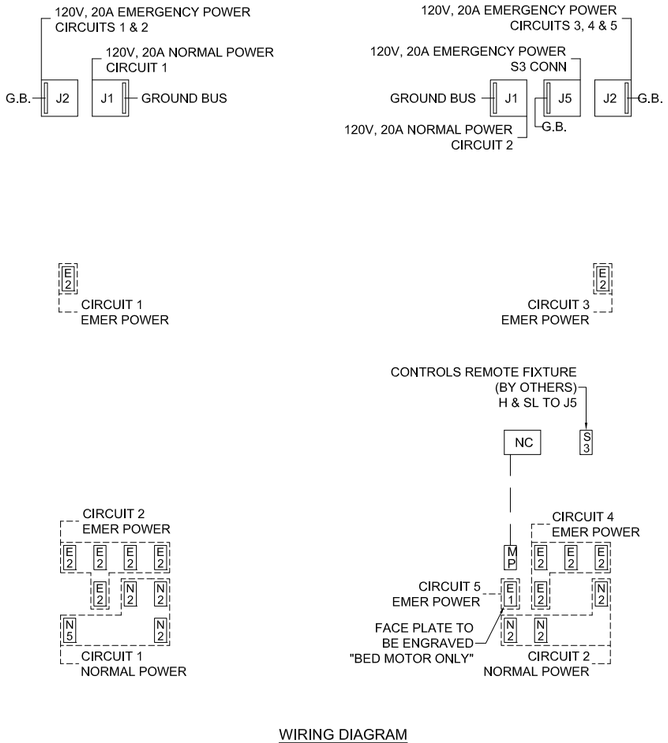

WIRING DIAGRAM

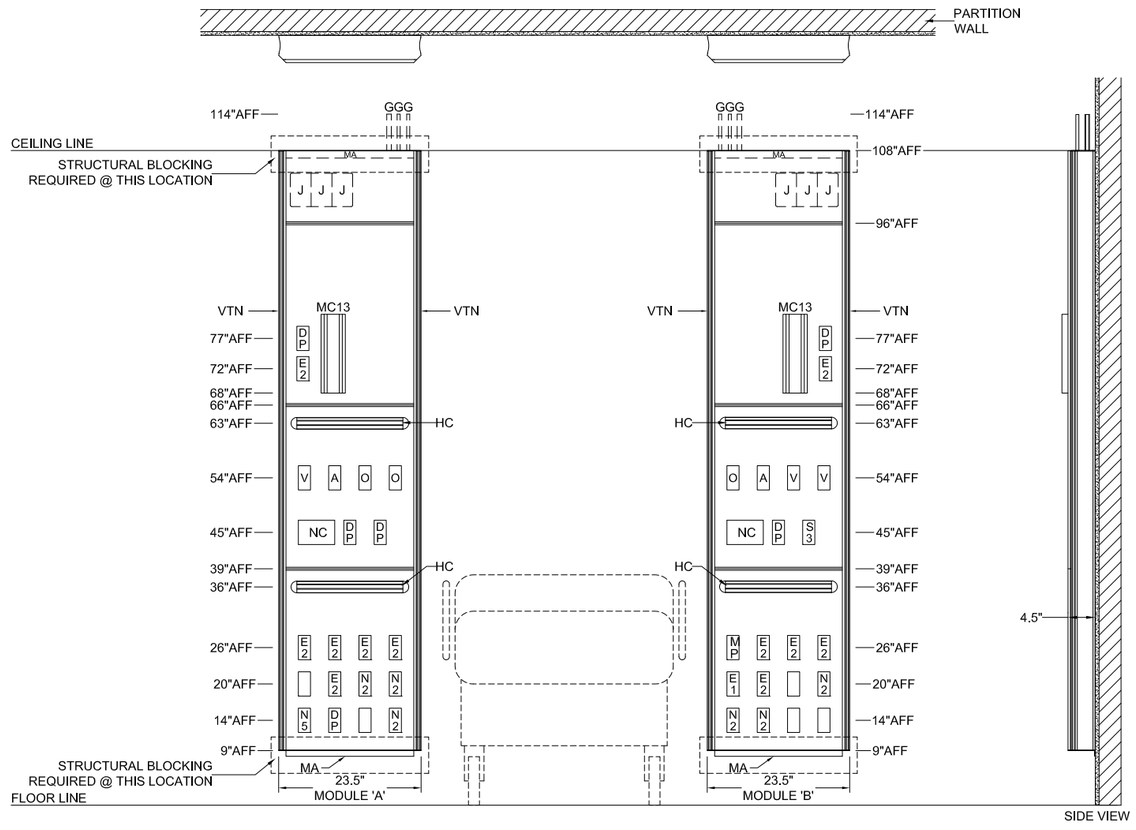

GENERAL SPECIFICATIONS:

ELECTRICAL		PLUMBING		FINISHES			
NORMAL POWER JUNCTION BOX:	J	COPPER TUBING TYPE:	L	LAMINATE: L1			
EMERGENCY POWER JUNCTION BOX:	J	OXYGEN SIZE (I.D.):	1/2"	TYPE:	LAMINATE BRAND:	LAMINATE COLOR:	GRAIN ORIENTATION:
LIGHTING JUNCTION BOX:	J	MEDICAL AIR SIZE (I.D.):	1/2"	3DL	-	-	-
LV CONDUIT STUBS:	C	VACUUM SIZE (I.D.):	3/4"				
CONDUIT SIZE; LINE VOLTAGE:	1/2"						
CONDUIT SIZE; LOW VOLTAGE:	3/4"						
CONDUIT CONNECTORS:	STD. SET SCREW						
WIRE TYPE:	THHN, STRANDED			ELECTRICAL COVER PLATES:	STAINLESS OR NYLON TO MATCH DEVICE		
WIRE SIZE:	12 AWG			VERTICAL TRACKS:	PLATINUM GREY		
GROUND WIRE COLOR:	GREEN			UNIT TRIM:	PLATINUM GREY		

LEGEND:

REQ	SYM	DESCRIPTION	REQ	SYM	DESCRIPTION
3	O	OXYGEN OUTLET	6	DP	DATA OUTLET PROVISION
2	A	AIR OUTLET	2	MC13	MONITOR CHANNEL ONLY, 13" LENGTH
3	V	VACUUM OUTLET	4	HC	HORIZONTAL ACCESSORY CHANNEL
6	N2	DUPLEX RECEPTACLE, 8300 IVORY 20A, 125V, H.G., NORMAL POWER	4	VTN	NEOTRACK® VERTICAL EQUIPMENT MOUNTING TRACK, FASCIA
1	N5	USB CHARGER RECEPTACLE, HUBBELL, 20A, 125V AC, IVORY, USB8300A5I			
1	E1	SINGLE RECEPTACLE, 8310 RED, 20A, 125V, H.G., EMER. POWER			
11	E2	DUPLEX RECEPTACLE, 8300 RED 20A, 125V, H.G., EMER. POWER			
1	S3	LIGHT SWITCH, 1P, 20A, 125/277V, RED TOGGLE HANDLE			
2	NC	NURSE CALL PROVISION			
1	MP	MULTI-PIN BED RECEPT. PROVISION			

ACCESSORIES NOT SHOWN (PER UNIT)

REQ	DESCRIPTION

MODULAR SERVICES COMPANY®
500 EAST BRITTON ROAD
OKLAHOMA CITY, OK 73114
www.modularservices.com

PROJECT
HOSPITAL
PROJECT
CITY, STATE

TOTAL QTY: X

EVOLUTION SERIES® 7600-S
SURFACE MOUNTED MODEL #7633-S

AS SHOWN:	DRAWN BY:	DRAWING #	
X	XXX	4XXXX	
OPPOSITE:	DATE:	PROJECT #:	SALES ORDER #:
X	XX/XX/XX	XXXX	XXXXX